


Industrial Sweeper Series





YZ-S1

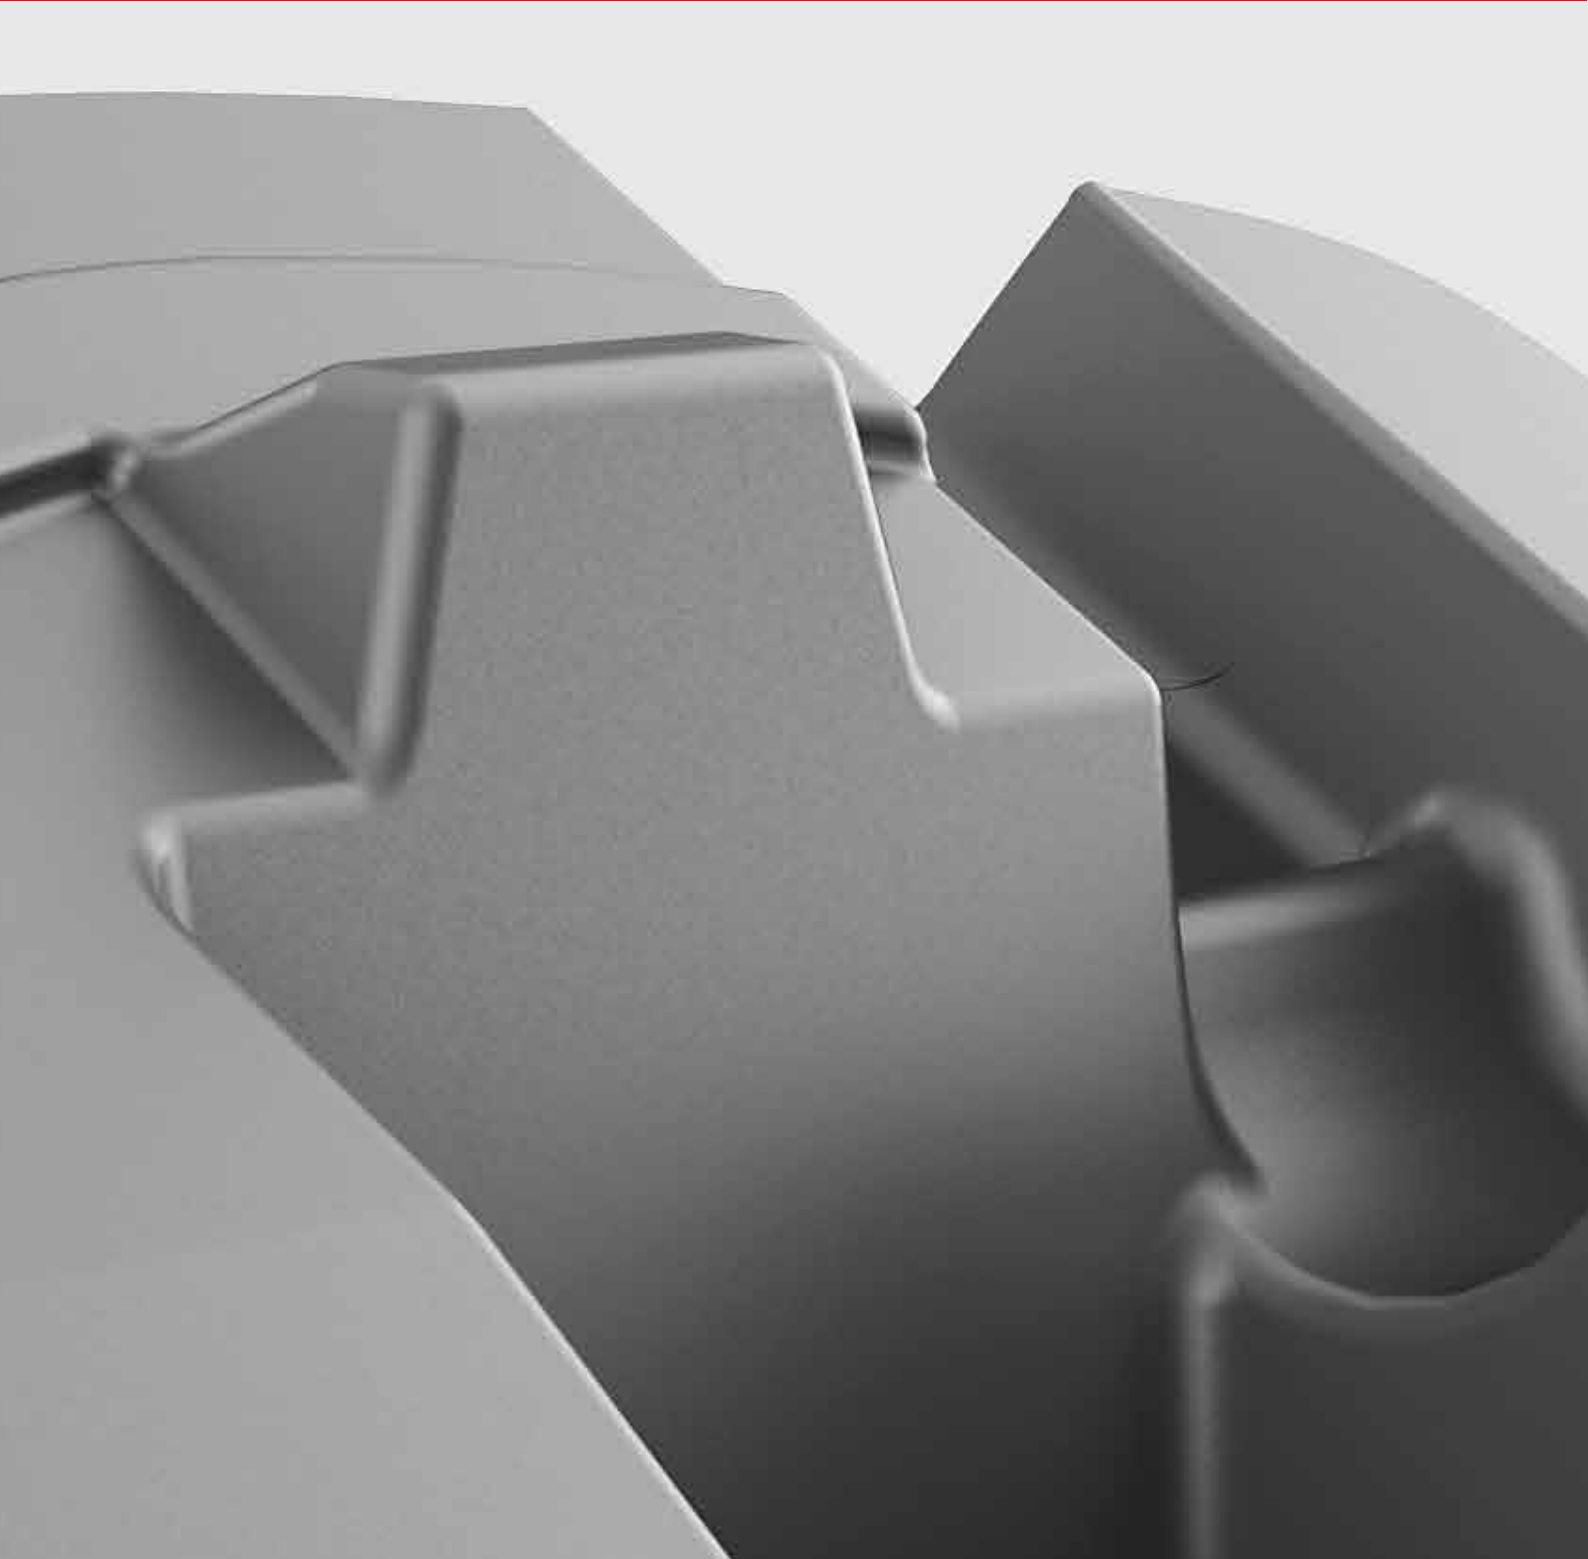

Push-type sweeper

Functional features

- 55L large capacity dust collector
- Powerful brushing and pushing
- Easy and convenient free adjustment



Product parameters

Item	Unit	Number
Sweep width	mm	1000
Width of side brush	mm	/
Working Hours	h	All day
Traveling Motor	w	/
Battery capacity	v/ah	/
Machine weight	kg	27.5
Main brush width	mm	480
Working efficiency	m ² /h	3860
Dust tank capacity	L	55
Brush Motor	w	/
Walking speed	km/h	0-8
Product size	mm	1300*1000*1035

YZ-S2



Sweeping + Vacuuming

Functional Features

- Bulk garbage can be removed as soon as it is pushed
- High quality brushes
- Wear-resistant rubber wheel



Product Parameters

Item	Unit	Number
Sweep width	mm	750
Width of side brush	mm	400
Working Hours	h	All day
Traveling Motor	w	/
Battery capacity	v/ah	/
Machine weight	kg	11.2
Main brush width	mm	/
Working efficiency	m ² /h	2350
Dust tank capacity	L	50
Brush Motor	w	/
Walking speed	km/h	0-8
Product size	mm	1000*750*830



YZ-S3 >>>

Spray Dust Control Filtration Upgrade

Functional Features

- Electric push sweeper
- 100cm clean width
- Intelligent electric quantity protection



Product Parameters

Item	Unit	Number
Sweep width	mm	1000
Width of side brush	mm	400
Working Hours	h	3-4
Traveling Motor	w	/
Battery capacity	v/ah	12/100
Machine weight	kg	65
Main brush width	mm	400
Working efficiency	m ² /h	4000
Dust tank capacity	L	22
Brush Motor	w	120
Walking speed	km/h	0-8
Product size	mm	1000*1300*1000

YZ-S320 >>>

Sweeping + Vacuuming

Functional Features

- One step in place
- Wide range of use
- Folding Push Handle



Product Parameters

Item	Unit	Number
Sweep width	mm	850
Width of side brush	mm	350
Working Hours	h	5
Traveling Motor	w	/
Battery capacity	v/ah	24/24
Machine weight	kg	48
Main brush width	mm	700
Working efficiency	m ² /h	3150-5250
Dust tank capacity	L	56
Brush Motor	w	120
Walking speed	km/h	0-8
Product size	mm	1300*850*1050

YZ-S4

Ride-on Sweeper

Functional Features

- Sweeping&vacuuming combined
- 1250mm clean width
- Dedicated factory cleaning



Product Parameters

Item	Unit	Number
Sweep width	mm	1250
Width of side brush	mm	400
Working Hours	h	2-2.5
Traveling Motor	w	800
Battery capacity	v/ah	48/52
Machine weight	kg	396
Main brush width	mm	490
Working efficiency	m ² /h	6380
Dust tank capacity	L	80
Brush Motor	w	700
Walking speed	km/h	/
Product size	mm	1600*1250*1300

YZ-S5 >>>

Sweeping + Vacuuming

Functional Features

- Sweeping&vacuuming combined
- Double disc brake
- The volume of the water tank is larger and the cleaning is large



Product Parameters

Item	Unit	Number
Sweep width	mm	1350
Width of side brush	mm	490
Working Hours	h	2~3
Traveling Motor	w	800
Battery capacity	v/ah	48/58
Machine weight	kg	496
Main brush width	mm	590
Working efficiency	m ² /h	8500
Dust tank capacity	L	120
Brush Motor	w	700
Walking speed	km/h	0-10
Product size	mm	1650*1350*1260

YZ-S6 >>>

Quick dust cleaning

Functional Features

- Sweeping&vacuuming combined
- 1450mm clean width
- Dedicated factory cleaning



Product Parameters

Item	Unit	Number
Sweep width	mm	1450
Width of side brush	mm	2*500
Working Hours	h	3-4
Traveling Motor	w	1200
Battery capacity	v/ah	80
Machine weight	kg	580
Main brush width	mm	590
Working efficiency	m ² /h	/
Dust tank capacity	L	170
Brush Motor	w	800
Walking speed	km/h	0-10
Product size	mm	1600*1450*1450

YZ-S8

Semi Enclosed Sweeper

Functional Features

- Easy to drive and clean
- 7-hour service life
- Four brushes for dust collection



Product Parameters

Item	Unit	Number
Sweep width	mm	1800
Width of side brush	mm	500*4
Working Hours	h	4~6
Traveling Motor	w	1500
Battery capacity	v/ah	100
Machine weight	kg	600
Main brush width	mm	690
Working efficiency	m ² /h	/
Dust tank capacity	L	180
Brush Motor	w	1000
Walking speed	km/h	/
Product size	mm	2200*1800*1850

YZ-S9



Semi-enclosed sweeper

Functional Features

- ABS Antilock System
- Strong Seismic Dust System
- Five-brush linkage design



Product Parameters

Item	Unit	Number
Sweep width	mm	1900
Width of side brush	mm	500*4
Working Hours	h	4~6
Traveling Motor	w	1800
Battery capacity	v/ah	48/100
Machine weight	kg	760
Main brush width	mm	785
Working efficiency	m ² /h	15000
Dust tank capacity	L	200
Brush Motor	w	1000
Walking speed	km/h	0-12
Product size	mm	2500*1900*2250

YZ-S10 >>>

Enclosed Sweeper

Functional Features

- Powerful cleaning
- Suitable for kinds of floor
- Warehouse, workshop and factory



Product Parameters

Item	Unit	Number
Sweep width	mm	2000
Width of side brush	mm	500*4
Working Hours	h	4-6
Traveling Motor	w	1500
Battery capacity	v/ah	150
Machine weight	kg	780
Main brush width	mm	790
Working efficiency	m ² /h	/
Dust tank capacity	L	200
Brush Motor	w	1000
Walking speed	km/h	/
Product size	mm	2000*1900*1900

YZ-S11 >>>

New ways of cleaning

Functional Features

- Low labor costs and improved cleaning efficiency
- Intelligent Operating Platform
- Powerful motor for Yangtze



Product Parameters

Item	Unit	Number
Sweep width	mm	2000
Width of side brush	mm	800
Working Hours	h	6~8
Traveling Motor	w	1800
Battery capacity	v/ah	48/150
Machine weight	kg	872
Main brush width	mm	800
Working efficiency	m ² /h	24600
Dust tank capacity	L	220
Brush Motor	w	1000
Walking speed	km/h	/
Product size	mm	2100*2000*2000

YZ-S12 >>>

Fully enclosed sweeper

Functional Features

- Fully automatic, efficient cleaning
- Lifetime maintenance of equipment
- Dust Suppression by Double Spray Spray



INDUSTRIAL FLOOR SWEEPER



Product Parameters

Item	Unit	Number
Sweep width	mm	2000
Width of side brush	mm	800
Working Hours	h	6~8
Traveling Motor	w	1800
Battery capacity	v/ah	48/150
Machine weight	kg	872
Main brush width	mm	800
Working efficiency	m ³ /h	24600
Dust tank capacity	L	220
Brush Motor	w	1000
Walking speed	km/h	/
Product size	mm	2100*2000*2000

YZ-S13 >>>

Ride-on Sweeper

Functional Features

- Strong four sets of side brushes
- Long-lasting
- Sweeping and suction in one



Product Parameters

Item	Unit	Number
Sweep width	mm	2100
Width of side brush	mm	4*550
Working Hours	h	6~8
Traveling Motor	w	2000
Battery capacity	v/ah	48/150
Machine weight	kg	960
Main brush width	mm	800
Working efficiency	m ² /h	25600
Dust tank capacity	L	230
Brush Motor	w	1000
Walking speed	km/h	/
Product size	mm	2650*2100*2350

YZ-S14 >>>

Yangzi new sweeper

Functional Features

- Quick barrel change
- Property special vehicle for town environmental sanitation community
- Equipped with powerful high pressure water gun



Product Parameters

Item	Unit	Number
Sweep width	mm	1900-2100
Width of side brush	mm	/
Working Hours	h	4~6
Ac drive motor work	kw	5.5
Battery capacity	v/ah	48/300
Machine weight	kg	1580
Main brush width	mm	700
Working efficiency	m ² /h	35600
Dust tank capacity	L	240
Brush Motor	w	1200
Walking speed	km/h	25
Tank capacity	L	200
Product size	mm	3950*2050*1200

YZ-S15 >>>

New Convenient Cleaning Car

Functional Features

- Electric shock dust
- Endurance
- High quality edge brush





Product Parameters

Item	Unit	Number
Sweep width	mm	1900-2050
Width of side brush	mm	480
Working Hours	h	4-6
Ac drive motor work	kw	1800
Battery capacity	v/ah	48/150
Machine weight	kg	1100
Main brush width	mm	800
Working efficiency	m ² /h	15000
Dust tank capacity	L	300
Brush Motor	w	800
Walking speed	km/h	10
Tank capacity	L	180
Product size	mm	2600*2100*2350

Industrial Scrubber Series



YZ-X1



Small Floor Scrubber

Functional Features

- Scrubber&Wash&Vacuum three-in-one
- It is widely used
- Special motor for floor scrubber



Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	1350
Width of brush plate	mm	330
Width of absorbent steak	mm	460
Rotating speed of brush	rpm	180
Brush plate motor	w	300
Power of suction	w	500
Capacity of clean/	L	5.4/11
Battery capacity	v/ah	12/32*2
working hours	h	2-2.5
Whole machine weight	kg	62
Product size	mm	900*400*1000

YZ-X2



Walk behind floor scrubber

Functional Features

- Shopping malls / supermarkets / factory workshops
- Strong suction system
- Double floating ball induction



Product Parameters

Item	Unit	Maintenance-free type	Liquid adding type	Wire type
Cleaning efficiency	m ² /h	2800	2800	2800
Width of brush plate	mm	600	600	600
Width of absorbent steak	mm	800	800	800
Rotating speed of brush plate	rpm	195	195	195
Brush plate motor power	w	550	550	550
Power of suction motor	w	550	550	550
Capacity of clean/sewage tank	L	50/45	50/45	50/45
Battery capacity	v/ah	12V100A*2	12V100A*2	no
working hours	h	2-3	2-3	
Whole machine weight	kg	151	150	111
Product size	mm	1200*800*1050	1200*800*1050	1200*800*1050

YZ-GX1

Wireless floor scrubber

Functional Features

- Strong suction system
- Non marking skid resistant tire
- One key convenient operation



Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	3450
Width of brush plate	mm	600
Width of absorbent steak	mm	780
Rotating speed of brush plate	rpm	195
Brush plate motor power	w	500
Power of suction motor	w	400
Capacity of clean/sewage tank	L	55/65
Battery capacity	v/ah	12V100A*2
working hours	h	2-3
Whole machine weight	kg	127
Product size	mm	1380*780*1240

YZ-X4



Walk behind floor scrubber

Functional Features

- Floor dry without any trace
- Multi version selection
- Strong suction motor



Product Parameters

Item	Unit	Self-pushed type	
Cleaning efficiency	m ² /h	3300	3300
Width of brush plate	mm	600	600
Width of absorbent steak	mm	820	820
Rotating speed of brush plate	rpm	195	195
Brush plate motor power	w	550	550
Power of suction motor	w	550	550
Capacity of clean/sewage tank	L	55/65	55/65
Battery capacity	v/ah	12v100A*2	12v100A*2
working hours	h	2-2.5	2-3
Whole machine weight	kg	160.5	150
	mm	1300*820*1070	1300*820*1070

YZ-X5 >>>

Ride on floor scrubber

Functional Features

- Simple and easy to operate
Save the time and cost
- High cleaning efficiency
time saving and money saving
- Suitable for more than 1000 M2



Product parameters

Item	Unit	Double-brush type	Single-brush type
Cleaning efficiency	m ² /h	3650	3650
Width of brush plate	mm	433*2	700
Width of absorbent steak	mm	1000	1000
Rotating speed of brush plate	rpm	230	230
Brush plate motor power	w	380*2	550W
Power of suction motor	w	500	500
Capacity of clean/sewage tank	L	84/81	84/81
Battery capacity	v/ah	12v100A*2	12v100A*2
working hours	h	2-3	2-3
Whole machine weight	kg	211	198
Product size	mm	1480*1000*1100	1480*1000*1100

YZ-X6



Ride on floor scrubber

Functional Features

- Scrubbing + washing + drying
- Hard ground wear resistance is more efficient
- Design of large capacity water tank



Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	4500
Width of brush plate	mm	433*2
Width of absorbent steak	mm	1000
Rotating speed of brush plate	rpm	230
Brush plate motor power	w	380*2
Power of suction motor	w	550
Capacity of clean/sewage tank	L	85/90
Battery capacity	v/ah	12V140A*2
working hours	h	3
Whole machine weight	kg	236
Product size	mm	1400*1000*1100

YZ-X7

Driving floor washer

Functional Features

- Commercial cleaning machine
- High cleaning efficiency, time and effort saving
- Automatic lifting of pickling head



Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	6500
Width of brush plate	mm	500*2
Width of absorbent steak	mm	1180
Rotating speed of brush plate	rpm	230
Brush plate motor power	w	300*2
Power of suction motor	w	600
Capacity of clean/sewage tank	L	138/140
Battery capacity	v/ah	6V220*4
working hours	h	3-4
Whole machine weight	kg	380
Product size	mm	1650*1200*1420

YZ-X8



Commercial driving floor washer

Functional Features

- Three in one washing, wiping and sucking
- Large capacity water tank
- Long standby and efficient cleaning





Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	8800
Width of brush plate	mm	460*2
Width of absorbent steak	mm	1180
Rotating speed of brush plate	rpm	230
Brush plate motor power	w	550*2
Power of suction motor	w	600
Capacity of clean/sewage tank	L	160/170
Battery capacity	v/ah	/
working hours	h	4-5
Whole machine weight	kg	490
Product size	mm	1650*1180*1450

YZ-X9



Industrial and commercial driving

Functional Features

- Wipe and suck three in one
- Long battery life
- Enlarge the water tank





Product Parameters

Item	Unit	Number
Cleaning efficiency	m ² /h	9800
Width of brush plate	mm	950
Width of absorbent steak	mm	1170
Rotating speed of brush plate	rpm	/
Brush plate motor power	w	500*2
Power of suction motor	w	850
Capacity of clean/sewage tank	L	245/260
Battery capacity	v/ah	36V200A*6
working hours Brush plate motor power	h	6-8
Whole machine weight	kg	535
Product size	mm	1780*1170*1400

High Efficiency Vacuum Cleaner Series



YZ-201



Dust suction/ Water suction/ Blowing

Functional Features

- House/ Car / Commercial Usage
- 1200W strong blowing
- One key start stop operation is simple



Product Parameters

Item	Unit	Number	Number
Barrel Capacity	L	15	18
Barrel Material	/	stainless steel	stainless steel
Power Cord Length	m	5	5
Vacuum Degree	Kpa	≥ 17.5	≥ 17.5
Noise Level	dB(A)	≤ 80	≤ 80
Rated Voltage	V	220V50Hz	220V50Hz
Rated Power	W	1200	1200
Type Of Dust Collection	/	Dry and wet blowing	Dry and wet blowing
Product Weight	Kg	3.2-5.6	3.2-5.6
Product Size	mm	300*300*485	300*300*520

YZ-106



1600W high suction vacuum

Functional Features

- Dry and wet blowing for multiple purposes
- Durable copper core motor
- 1600W high power and high efficiency motor



Product Parameters

Item		Unit	Number		
Rated voltage	V	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Barrel material	/	stainless steel	stainless steel	stainless steel	stainless steel
Rated power	W	1600W	1600W	1600W	1600W
Wire length	m	5	5	5	5
Type of dust collection	/	Both wet and dry	Both wet and dry	Both wet and dry	Both wet and dry
vacuum degree	Kpa	≥ 21	≥ 22	≥ 23	≥ 23
Noise level	dB	≤ 75	≤ 76	≤ 77	≤ 77
Product weight	Kg	7.6	9.5	11.8	11.8
Product size	mm	380*380*500	380*380*710	380*380*810	380*380*810

YZ-108

1800W commercial vacuum cleaner

Functional Features

- Multi layer filtration
- Thickened stainless steel barrel
- 40mm large diameter



Product Parameters

Item	单位 Unit	Number
Rated voltage	V	220V/50Hz
Barrel capacity	L	60
Barrel material	/	Stainless steel
Rated power	W	1800W
Wire length	m	5
Type of dust collection	/	Wet/dry/blowing
vacuum degree	Kpa	≥ 19
Noise level	dB	≤ 75
Product weight	Kg	11.9
Product size	mm	470*450*810

YZ-302 >>>

Large commercial vacuum c

Functional Features

- Push and suck to improve efficiency
- 0 consumables
- Industrial large capacity multi choice



Product Parameters

Item	Unit	Number
Rated voltage	V	220v-50Hz
Barrel capacity	L	70/80/100
Barrel material	/	Stainless wheel
Rated power	W	3200
Wire length	m	8
Type of dust collection	/	Wet/dry
vacuum degree	Kpa	≥ 20-23
Product weight	Kg	24/25/28
Noise level	dB	< 78
Product size	mm	600*505*830mm

YZ-306

Super strong commercial cleaner

Functional Features

- Super cleaning range
- 40mm large diameter
- Thickened stainless steel barrel



Product Parameters

Item	Unit	70L	80L	100L
Rated voltage	V	220	220	220
Rated power	W	3500	3500	3500
frequency	Hz	50	50	50
Noise level	dB	≈ ≤ 80.5	≈ ≤ 80.5	≈ ≤ 80.5
Net weight	Kg	23	23.3	23.6
Gross weight of product	Kg	24.6	25.7	28.3
vacuum degree	Kpa	≈ ≥ 19.5	≈ ≥ 19.5	≈ ≥ 19.5
Wire length	m	8	8	8
Product size	mm	600*505*830	600*505*910	600*505*990

YZ-408



High power vacuum cleaner

Functional Features

- Upgrade 3 motors
- Super cleaning range
- Multi layer filtration system



Product Parameters

Item	Unit	Number
Rated voltage	V	220v-50Hz
Barrel capacity	L	70/80/100
Barrel material	/	Stainless steel
Rated power	W	4800
Wire length	m	8
Type of dust collection	/	Wet/dry/blowing
vacuum degree	Kpa	≥ 23.1
Product weight	Kg	30/32/36
Noise level	dB	< 82
Product size	mm	600*505*840mm



YZ-504



Commercial vacuum cleaner

Functional Features

- Commercial / industrial dusts are cleaned by inhalation
- Thickened stainless steel barrel
- Super cleaning range



Product Parameters

Item	Unit	Number
Rated voltage	V	220v-50Hz
Barrel capacity	L	70/80/100
Barrel material	/	Stainless steel
Rated power	W	5400
Wire length	m	8
Type of dust collection	/	Wet/dry/blowing
vacuum degree	Kpa	≥ 24.6
Product weight	Kg	30/32/36
Noise level	dB	< 82
Product size	mm	600*505*840mm

YZ-C1 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V	48
Power	W	700
Filter Type	/	Pliyster
Air Volume	m ³ /h	234
Filtration Energy Efficiency	um	0.3
Suction	mbar	230
Barrel Capacity	L	15/30
Battery Capacity	aH	32
Area Of Filter Screen	cm ³	8520
Diameter Of Suction Port	mm	40
Noise Level	dB	65
Full Power Working Time	h	3-4
Product Size	mm	500*400*860

YZ-C2 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V	24
Power	W	1500
Filter Type	/	Pliyster
Air Volume	m ³ /h	351
Filtration Energy Efficiency	um	0.3
Suction	mbar	370
Barrel Capacity	L	60/80
Battery Capacity	aH	100
Area Of Filter Screen	cm ³	11620
Diameter Of Suction Port	mm	40
Noise Level	dB	65
Full Power Working Time	h	3-4
Product Size	mm	800*450*1100



YZ-C5 >>>



Product Parameters

Item	Unit	Number
Rated voltage	V	380
power	W	1750/2200
Filter type	/	Polyester
Filtration energy efficiency	um	0.3
suction	mbar	370/375
Barrel Capacity	L	30
Area of filter screen	cm ³	8000
Diameter of suction port	mm	40
Noise level	dB	65
Wire length	m	5
Product Size	mm	800*440*760

YZ-C6 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V	380
Power	W	3000/4000
Filter Type	/	Polyester
Air Volume	m ³ /h	275/318
Filtration Energy Efficiency	um	0.3
Suction	mbar	385/415
Barrel Capacity	L	80
Area Of Filter Screen	cm ³	18800
Diameter Of Suction Port	mm	40
Noise Level	dB	65
Wire Length	m	5
Product Weight	Kg	70/79
Product Size	mm	1050*450*1220

YZ-C7 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V	380
Power	W	3000/4000/5500/7500
Filter Type	/	Polyester
Filtration Energy Efficiency	um	0.3
Suction	mbar	385/415/425/450
Barrel Capacity	L	100
Area Of Filter Screen	cm ³	25000
Diameter Of Suction Port	mm	50
Noise Level	dB	65
Wire Length	m	8
Product Size	mm	1170*550*1400

YZ-C8 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V	380
Power	W	3000/4000/5500/7500
Filter Type	/	Polyester
Filtration Energy Efficiency	um	0.3
Suction	mbar	385/415/425/450
Barrel Capacity	L	100
Area Of Filter Screen	cm ³	25000
Diameter Of Suction Port	mm	50
Noise Level	dB	65
Wire Length	m	8
Product Weight	Kg	70
Product Size	mm	1170*550*1400



YZ-C9



Product Parameters

Item	Unit	Number
Rated Voltage	V	220
Power	W	2400/3600
Filter Type	/	Polyester
Filtration Energy Efficiency	um	0.3
Suction	mbar	260
Barrel Capacity	L	80
Area Of Filter Screen	cm ³	11620
Diameter Of Suction Port	mm	40
Noise Level	dB	80
Wire Length	m	8
Product Weight	Kg	33-34
Product Size	mm	620*620*1150

YZ-C10



Product Parameters

Item	Unit	Number
Rated Voltage	V	220
Power	W	2200
Filter Type	/	Polyester
Filtration Energy Efficiency	um	0.3
Suction	mbar	270
Barrel Capacity	L	100
Area Of Filter Screen	cm ³	28000
Diameter Of Suction Port	mm	50
Noise Level	dB	67
Wire Length	m	8
Product Size	mm	1070*546*1103

Commercial Cleaning Series





YZ-SF1 >>>



Product Parameters

Item	Unit	Number
Rated Voltage	V/Hz	220V/50
Suction Motor Power	W	1200
Power Of Rolling Brush Motor	W	40
Foaming Motor Power	W	132
Clean/sewage water tank	L	30/20
Air Flow	m ³ /h	180
Throat Length	m	4
Wire Length	m	15
Noise Level	dB	28
Weight	kg	60
Product Size	mm	850*430*290

YZ-DT1 >>>



Product Parameters

Item	Unit	Number
Working Width	mm	1150
Rolling Brush Speed	r/min	900
Rated Voltage	V/Hz	220V/50
Power	W	1200
Clean/sewage water tank	L	38/30
Wire Length	m	15
Product Size	mm	620*420*870

YZ-GY



Small high pressure cleaning machine

Functional Features

- Industrial large motor
- Crack and impact resistance
- 3 seconds fast water out



Product parameters

Item	Unit	Number
Voltage	V	220
Power	W	2200
Rated pressure	bar	80
Rated flow amount	L/min	13
Allowed pressure	bar	100
Max. flow amount	L/min	15
Power cord	mm	5
Gross weight	Kg	60
High pressure hose length	m	10
Product size	mm	1057*565*854

YZ-CF1

Floor Drying Machine

Functional Features

- Extended power cord
- Copper wire motor centrifugal wind wheel
- Overheat safety protection



Product parameters

Item	Unit	Number
Rated voltage	V/Hz	200V/50
Power	W	750
RPM	Rpm	1230/1320/1415
Weight	Kg	15
Length of wire	7m	7.5m
Product size	mm	480*430*480

YZ-B3015



Semi Automatic Forklift

Functional Features

- Time saving and labor saving in handling
- Push button lifting
- New C fork



Product Parameters

Item	Unit	Number	Number	Number
Rated Load	Kg	2000	1000	1500
Load Center Distance	mm	450/535	450/535	450/535
Product Weight	Kg	410	308	354
Bearing Wheel Material	/	Nylon wheel	Nylon wheel	Nylon wheel
Steering Wheel Dimensions	mm	180*50	180*50	180*50
Front Tyre	mm	80*60	80*60	80*60
Wheelbase	mm	1200	1200	1200
Number Of Front / Steering Wheels	↑	2/2	2/2	2/2
Height Of Mast Retraction	mm	2320	2085	1580
Lifting Height	mm	3500	1600	2000
Maximum Height Of Working Gantry	mm	4030	2085	2530
Minimum Fork Height	mm	80-90	80-90	80-90
Overall Length	mm	1740	1740	1740
Width Of Car Body	mm	780	780	780
Fork Length	mm	1080	1080	1080
Height Of Gantry From The Ground	mm	80	80	80
Tray Channel Width	mm	1705	1705	1705
Turning Radius	mm	1415	1415	1415
Lifting Speed (Full Load / No Load)	mm/s	135/150	135/150	135/150
Descent Speed (Full Load / No Load)	mm/s	Manual	Manual	Manual
Increase Motor Power	Kw	1.6	1.6	1.6
Battery Voltage / Capacity	V	12/180	12/180	12/180
/Fork Product Size	mm	1142*180*410	1142*180*410	1142*180*410

YZ-Q3015



Full Automatic Stacker

Functional Features

- Stable thick steel
- Selected high quality steel fork
- Pure copper motor





Product Parameters

Item	Unit	Number
Rated Load	kg	1500
Raise The Height	mm	1600/2000/2500/3000/3500
Minimum Fork Height	mm	85
Overall Length	mm	1830
Overall Width	mm	820
Fork Product Size	mm	60*180*1150
Fork Width	mm	685
Turning Radius	mm	1474
Lifting Speed Full Load / No Load	m/s	0.105/0.17
Descent Speed Full Load / No Load	m/s	0.126
Improve Low Power	Kw	48V/2.2
Drive Motor Power	kw	48V/1.0
Battery Specifications	V/ah	12V/60Ah*4

YZ-TF



Manual hydraulic lifting platform vehicle

Functional Features

- Handle lifting platform
- Strengthen and stabilize the scissors
- High quality fully enclosed cylinder





Product Parameters

Item	Unit	TF-15 Single cut	TFD-15 Double cut	TF-30 Single cut	TFD-35 Double cut	TF-50 Single cut
have a load	kg	150	150	300	350	500
deadweight	mm	46	55	77	105	105
Bearing wheel size	mm	100×25	100×25	125×40	125×40	125×40
Platform size	mm	700×450	700×450	815×500	910×500	815×500
Maximum height	mm	720	1230	880	1300	880
minimum altitude	mm	220	250	285	355	285
Types of wheels	/	Polyurethane castors /Universal braking wheel	Polyurethane castors /Universal braking wheel	Polyurethane castors /Universal braking wheel	Polyurethane castors /Universal braking wheel	Polyurethane castors /Universal braking wheel
hand shan	/	Foldable handle	Fixed handle	Foldable handle	Fixed handle	Foldable handle

YZ- Forklifts



Manual hydraulic carrier

Functional Features

- The integral pouring cylinder is safe without oil leakage
- Ergonomics upgrade package handle
- Silent wear resistant polyurethane widening wheel



Product Parameters

Item	Unit	AC-85mm 2.5 T	AC-85mm 2.5 T	AC-85mm 3 T	AC-85mm 3 T	AC-85mm 3.5 T	AC-85mm 3.5 T	AC-85mm 5 T	AC-85mm 5 T
have a load	kg	2500	2500	3000	3000	3500	3500	5000	5000
deadweight	kg	62	70	74	80	75.8	80.7	105	130
Bearing wheel size (single)	mm	80*93	80*93	80*93	80*93	/	/	/	/
Bearing wheel size (double)	mm	80*70	80*70	80*70	80*70	80*70	80*70	80*66/80*70	80*66/80*70
Maximum height of fork	mm	195	195	195	195	195	195	200	200
Minimum height of fork	mm	85	85	85	85	85	85	85	85
Types of wheels	/	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/iron wheel	Nylon/iron wheel
Steering wheel size	mm	180*50/200*50	180*50/200*50	180*50/200*50	180*50/200*50	180*50	180*50	178*52/180*50	178*52/180*50
Outside width of fork	mm	540	685	540	685	550	685	550	685
Fork length	mm	1150	1220	1150	1220	1150	1220	1150	1220
Width inside fork	mm	220	365	220	365	230	365	190	325
Height of handle from ground	mm	1248	1248	1248	1248	1245	1245	1220	1220
hand shan	/	Rubber/iron handle	Rubber/iron handle	Rubber/iron handle	Rubber/iron handle	Rubber handle	Rubber handle	Large rubber handle	Large rubber handle
oil hole	/	4 个	4 个	4 个	4 个	Standard	Standard	No	No
Plate thickness/stiffener	mm	3.5/ Full stiffener	3.5/ Full stiffener	3.5/ Full stiffener	3.5/ Full stiffener	Full stiffener	Optional	Splicing/welding	Splicing/welding
Foot release	/	Optional	Optional	Optional	Optional	Yes	Yes	Yes	Yes
ribbing	/	No	No	No	No	Optional	Optional	No	No
Width of one-leg fork	mm	160	160	160	160	/	/	/	/

ELECTRIC FORKLIFT TRUCK SERIES



Safai®

Item	Unit	BF-85mm 2.5 T	BF-85mm 2.5 T	BF-85mm 3 T	BF-85mm 3 T	DB-75mm 2 T	DB-75mm 2 T	DB-75mm 2.5 T	DB-75mm 2.5 T
have a load	kg	2500	2500	3000	3000	2000	2000	2500	2500
deadweight	kg	61KG	65	67.5	72	50	53	57	61
Bearing wheel size (single)	mm	80*93/74*93	80*93/74*93	80*93/74*93	80*93/74*93	70*80	70*80	70*80	70*80
Bearing wheel size (double)	mm	80*70/74*70	80*70/74*70	80*70/74*70	80*70/74*70	70*60	70*60	70*60	70*60
Maximum height of fork	mm	190	190	190	190	185	185	185	185
Minimum height of fork	mm	85	85	85	85	75	75	75	75
Types of wheels	/	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel
Steering wheel size	mm	180*50	180*50	180*50	180*50	160*50	160*50	160*50	160*50
Outside width of fork	mm	550	685	550	685	550	685	550	685
Fork length	mm	1150	1220	1150	1220	1150	1220	1150	1220
Width inside fork	mm	230	365	230	365	250	385	250	385
Height of handle from ground	mm	1230	1230	1230	1230	1180	1180	1180	1180
hand shan	/	Rubber/iron handle	Rubber/iron handle	Rubber/iron handle	Rubber/iron handle	iron handle	iron handle	iron handle	iron handle
oil hole	/	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Plate thickness/stiffener	mm	2.75/ Half stiffener	2.75/ Half stiffener	3.5/ Full stiffener	3.5/ Full stiffener	2.5/ Bridge-shaped borad	2.5/ Bridge-shaped borad	2.75/ Half stiffener	2.75/ Half stiffener
Foot release	/	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ribbing	/	Optional	Optional	Optional	Optional	No	No	No	No
Width of one-leg fork	mm	160	160	160	160	150	150	150	150
Item	Unit	DF-75mm 2.5 T	DF-75mm 2.5 T	DF-75mm 3 T	DF-75mm 3 T	DF-85mm 2.5 T	DF-85mm 2.5 T	DB-85mm 3 T	DF-85mm 3 T
have a load	kg	2500	2500	3000	3000	2500	2500	3000	3000
deadweight	kg	66	72	68	75	57	61	65	70
Bearing wheel size (single)	mm	74*93	74*93	74*93	74*93	80*93	80*93	80*93	80*93
Bearing wheel size (double)	mm	74*70	74*70	74*70	74*70	80*70	80*70	80*70	80*70
Maximum height of fork	mm	185-190	185-190	185-190	185-190	190	190	190	190
Minimum height of fork	mm	75	75	75	75	85	85	85	85
Types of wheels	/	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel	Nylon/PU wheel
Steering wheel size	mm	180*50	180*50	180*50	180*50	180*50	180*50	180*50	180*50
Outside width of fork	mm	550	685	550	685	550	685	550	685
Fork length	mm	1150	1220	1150	1220	1150	1220	1150	1220
Width inside fork	mm	230	365	230	365	230	365	230	365
Height of handle from ground	mm	1230	1230	1230	1230	1180	1180	1180	1180
hand shan	/	ubber/iron handle	ubber/iron handle	ubber/iron handle	ubber/iron handle	iron handle	iron handle	iron handle	iron handle
oil hole	/	4	4	4	4	Optional	Optional	Optional	Optional
Plate thickness/stiffener	mm	3.5/ Full stiffener	3.5/ Full stiffener	3.5/ Full stiffener	3.5/ Full stiffener	2.75/ Half stiffener	2.75/ Half stiffener	3.5/ Full stiffener	3.5/ Full stiffener
Foot release	/	No	No	No	No	Yes	Yes	Yes	Yes
ribbing	/	No	No	No	No	No	No	No	No
Width of one-leg fork	mm	160	160	160	160	160	160	160	160

YZ-QB



electric pallet truck

Functional Features

- Curtis Electronic Control System
- Thickening and reinforcing plates
- Maintenance-free battery



ELECTRIC FORKLIFT TRUCK SERIES



Product Parameters

Item	Unit	YZ-QBA15/YZ-QBA20	YZ-QBM15/YZ-BBM15
Load capacity/rated load	/	Hand-push	Hand-push
Load centre distance	Q(kg)	1500/2000	1500
Lift height	C(mm)	500	500
Lowered fork height	h3(mm)	190	190
Fork dimensions	h13(mm)	85	85
Width over forks	s/e/l(mm)	53/160/1150	53/160/1150
Turning radius	b3(mm)	550/680	550/680
Wheelbase	Wa(mm)	1470	1400
Wheelbase	y	1270	1270
Tyres	/	Polyurethane	Polyurethane
Wheel Size, Front Wheel	$\varphi \times w$ (mm)	$\Phi 210 \times 70$	$\Phi 210 \times 70$
Wheel Size, Rear Wheel	$\varphi \times w$ (mm)	$\Phi 80 \times 70$	($\Phi 80 \times 70$)
1000x1200 Crosswise	Ast(mm)	2225	2100
800x1200 Lengthwise	Ast(mm)	2095	2000
Travel speed,laden/ unladen	km/h	4.5	4
Lift speed,laden/ unladen	m/s	21/26	/
Max gradient performance,laden/unladen	%	3/10	3/10
Overall Length	l1(mm)	1670	1660
Overall Width	B1(mm)	680	680
Service brake	/	Electrical braking	Electrical braking
Battery voltage/nominal capacity	v/ah	24V/75	24/20
Manufacturer of drive control	/	CURTIS	CURTIS
Drive motor	km/h	0.75/0.8	0.6
Lift motor	km/h	0.8	0.8/-
Service weight(with battery)	kg	210	130/110
Steering	/	Mechanical turning	Mechanical turning

YZ-PT



Semi-automatic hydraulic handler

Functional Features

- The Era of Electrical Intelligence
- High Performance Maintenance Free
- Thickened sheet metal parts





Product Parameters

Item	Unit	YZ-PT20	YZ-PT15	YZ-PTL20
Specification	/	550*1150/685*1220	550*1150/685*1220	550*1150/685*1220
Operation Type	/	Hand-push	Hand-push	Hand-push
Rated load	Q(kg)	2000	1500	2000
Wheelbase	y	1230/1300	1230/1300	1200/1270
Self-weight	kg	160/180	160/180	82/88
Wheel Material		PU	PU	PU/Nylon
Lift height	h3(mm)	100	100	100
Handle height max/min	h14(mm)	1180/800	1180/800	1180/800
Height when forks are lowered	h13(mm)	≤ 83	83	83
Overall length	l1(mm)	1570/1640	1570/1640	1546/1616
Fork size	s/e/l(mm)	1150/1220	1150/1220	1150/1220
Fork outer width	b3(mm)	560/685	560/685	560/685
Minimum Ground Clearance	m(mm)	23	23	23
Passage width	Ast(mm)	2000/2070	2000/2070	1900/1970
Maximum climbing capacity full load/no load	%	3/6	3/6	3/6
驱动电机功率	kw	0.75	0.85	0.35*2 Taiwan
Drive motor power	v	48	48	48
Noise level	dB	<70	<70	<70

YZ-QDA



Electric stacker

Functional Features

- Stable thick steel
- Selected high quality steel fork
- Pure copper motor



ELECTRIC FORKLIFT TRUCK SERIES



Product Parameters

Item	Unit	YZ-QDA 1.0 T	YZ-QDA 1.2 T	YZ-QDA 1.5 5T
Operator type	/	Walking (optional station driving)	Walking (optional station driving)	Walking (optional station driving)
Load capacity/rated load	Q(kg)	1000	1200	1500
Load centre distance	C(mm)	600	600	600
Lift height	h3(mm)	1600/2500/3000/3500	1600/2000/2500/3000/3500/4000	
Lowered mast height	h1 (mm)	2080/1830/2080/2300	2010/1485/1735/1985/2235/2485	
Extended mast height	h4 (mm)	2050/2950/3450/3950	2035/2435/2935/3435/3935/4435	
Lowered fork height	h13(mm)	90	90	90
Fork dimensions	s/e/l(mm)	60/142/1070	60/142/1070	1100/1150
Width over forks	b5(mm)	660	660	560/680
Turning radius	Wa(mm)	1390	1390	2090 With pedal ; 1675 Without pedals
Tyres	/	Polyurethane	1390	Polyurethane
Ground clearance	m2(mm)	30	30	30
1000x1200 Crosswise	Ast(mm)	2145	2145	2325
800x1200 Lengthwise	Ast(mm)	2050	2050	/
Travel speed,laden/unladen	km/h	3.5/4	3.5/4	4.5/5
Lift speed,laden/unladen	mm/s	100/200	100/200	100/120
Max gradient performance,laden/unladen	%	3/10	3/10	5/8
Overall Length	l1(mm)	1750	1750	2010/2060
Overall Width	b1(mm)	790	790	850
Service brake	/	Electric brake	Electric brake	Electric brake
Battery voltage/nominal capacity	V/Ah	24V/65/85	24V/65/85	100
Manufacturer of drive control	/	CURTIS	CURTIS	/
Drive motor	kw	0.6	0.6	1.5
Lift motor	kw	2	2	2.2
Service weight(with battery)	kg	553	553	35*2 / 195
Steering	/	机械转向	机械转向	机械转向

Lifting platform series



YZ-DD



Single Column Lifting Platform

Functional Features

- Aviation grade aluminum alloy material
- Strong bearing capacity
- Heighten guardrail



Product Parameters

Item	Unit	YZDD1-5	YZDD1-6	YZDD1-8	YZDD1-9	YZDD1-10
Platform Load	Kg	150	150	150	150	150
Maximum Number Of Employees	/	1	1	1	1	1
Maximum Working Height	M	7	8	10	11	12
Maximum Working Platform	M	5	6	8	9	10
Vehicle Product Size	m	1.34*0.85*1.99	1.34*0.85*1.99	1.34*0.85*1.99	1.45*0.85*1.99	1.45*0.85*1.99
Platform Product Size	m	0.60 x 0.55	0.60 x 0.55	0.60 x 0.55	0.60 x 0.55	0.60 x 0.55
Platform Product Size	m	1.7 x 1.67	1.7 x 1.67	1.7 x 1.67	1.93x 1.77	1.93 x 1.77
Lifting Motor	Kw	0.75	0.75	0.75	0.75	1.1
Total Weight	Kg	302	325	378	400	430
Battery	V/Ah	12/100	12/100	12/100	12V/100	12/100
Dc Lifting Motor	Kw	1.5	1.5	1.5	1.5	1.5
Charger	V/A	12/5	12/5	12/5	12/5	12/5

YZ-GD



Single Column Lifting Platform

Functional Features

- Aviation grade aluminum alloy
- Tubing explosion proof system
- Self checking safety system



Product Parameters

Item	Unit	YZ-GD1-6	YZ-GD1-8	YZ-GD1-9	YZ-GD1-10	YZ-GD1-12
Maximum Working Height	m	8.2	9.8	11.2	12.4	14
Maximum Platform Height	m	6.2	7.8	9.2	10.4	12
Platform Load	Kg	150	150	150	136	120
Maximum Number Of Employees	/	1	1	1	1	1
Platform Product Size	m	0.67x0.66	0.67x0.66	0.67x0.66	0.67x0.66	0.67X0.66
Vehicle Height	m	1.99	1.99	1.99	1.99	2.68
Vehicle Width	m	0.74	0.74	0.74	0.74	0.81
Vehicle Length	m	1.24	1.36	1.4	1.42	1.46
Support Range	m	1.7x1.7	1.6x1.6	1.7x1.7	1.9x1.7	2.3x1.9
Total Weight	kg	320	345	365	385	460
Communication Ac	V	220	220	220	220	220
Alternating Current Dynamo	Kw	0.75	0.75	0.75	0.75	0.75

YZ-DS2



Double Column Lifting Platform

Functional Features

- The load is large and stable as a rock
- Anti misoperation of emergency stop
- Oil pipe explosion proof device
- Dual control platform



Product Parameters

Item	Unit	YZ-DS2-8	YZ-DS2-9	YZ-DS2-10	YZ-DS2-12
Platform Load	kg	200	200	200	200
Maximum Working Time	/	2	2	2	2
Maximum Working Height	m	10	11	12	14
Maximum Working Platform	m	8	9	10	12
Vehicle Length	m	1.54	1.54	1.76	1.76
Vehicle Width	m	1	1	1	1
Vehicle Height	m	1.99	1.99	1.99	1.99
Platform Height	m	1.30 x 0.62	1.30 x 0.62	1.52 x 0.62	1.52 x 0.62
Support Range	m	1.77 x 1.82	1.77 x 1.82	2.1 x 2.00	2.1 x 2.00
Lifting Motor	KW	1.5	1.5	1.5	1.5
Total Weight	kg	680	730	800	830

YZ-GS2



Aerial Work Platform

Functional Features

- It is widely used in many fields
- Leg interlock indication
- Explosion proof oil pipe device





Product Parameters

Item	Unit	YZGS2-8	YZGS2-9	YZGS2-10	YZGS2-12	YZGS2-14	YZGS2-14
Max. Workingheight	m	10m	11m	12.4m	14m	16m	18m
Max. Platform Height	m	8m	9m	10.4m	12m	14m	16m
Loading Capacity	kg	250kg	250kg	250kg	200kg	200kg	150kg
Occupants	/	2	2	2	2	2	1
Platform Dimension	m	1.45m x 0.7m	1.45m x 0.7m	1.45m x 0.7m	1.45m x 0.7m	1.8m x 0.7m	1.8m x 0.7m
Overall Dimensionm							
Overall Height	m	1.99m	1.99m	1.99m	1.99m	2.68m	2.68m
Overall Width	m	0.81m	0.81m	0.81m	0.81m	0.81m	0.81
Overall Length	m	1.45m	1.45m	1.45m	1.45m	1.88m	1.88
Outrigger Coverage	m	2.45m x 1.75m	2.45m x 1.75m	2.45m x 2.1m	2.45m x 2.1m	2.7m x2.8m	2.7m x2.8m
Weight							
AC	kg	610kg	680kg	715kg	750kg	892kg	996kg
DC	kg	660kg	735kg	765kg	800kg	942kg	1046kg
Power							
Ac		380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V	380V/220V/110V
AC Motor		1.5KW	1.5KW	1.5KW	1.5KW	1.5KW	1.5KW
DC		2x12V	2x12V	2x12V	2x12V	2x12V	2x12V
DC Motor		2.2KW	2.2KW	2.2KW	2.2KW	2.2KW	2.2KW
Charger		12V/15A	12V/15A	12V/15A	12V/15A	12V/15A	12V/15A

YZ-ZJ

Mobile scissor lift

Functional Features

- It is widely used in many fields
- The load is as big as a rock
- Extend the operation range of standing platform



Product Parameters

YZ-ZJ04		
Platform load	kg	240
Maximum platform height	m	4
Maximum number of workers	m	1
Platform size	m	1.15*0.60
Whole vehicle size	m	1.32*0.76*1.92
Extended platform load	kg	100
Extended platform size	m	0.55
Ascending/descending speed	sec	34/25
minimum turning radius	m	0
Maximum allowable working angle	°	1.5-2
Tyres (driving wheels)	m	0.23×0.08
Maximum climbing ability	%	25
wheelbase	m	1
Travel speed collapsed state	m/h	4
Driving speed lifting state	km/h	0.5
accumulator	km/h	2×12/100
Hoisting motor	V/KW	24/0.8
Drive motor	V/KW	2×24/0.3
charger	V/A	24/12
Whole machine weight	kg	660

LIFTING PLATFORM



Safai®

		YZ-ZJ06	YZ-ZJ08
Safe working load	kg	230	230
Extended platform load	kg	113	113
Maximum number of workers	/	2	2
Maximum working height	m	7.8	10
Maximum platform height	m	5.8	8
Whole machine length	m	1.86	2.48
Whole machine width	m	0.76	0.83
Height of the whole machine, the guardrail is not folded	m	2.18	2.32
Height of the whole machine, folded guardrail	m	1.84	1.99
Working platform size	m	1.67×0.74	2.27×0.81
Extended platform size	m	0.9	0.9
Minimum ground clearance, collapsed	mm	86	100
Minimum ground clearance, lifting shape	mm	16	19
wheelbase (of a vehicle)	m	1.085	1.895
Minimum turning radius, inner wheel	m	0	0
Minimum turning radius, outer wheel	m	1.64	2.2
Hoisting motor	V/KW	24/3.3	24/3.3
Machine running speed, folding	KW/H	3.5	3.5
Machine running speed, lifting	km/h	0.8	0.8
Ascending/descending speed	sec	18/22	28/40
accumulator	V/AH	4×6/225	4×6/225
charger	V/A	24/25	24/25
Maximum climbing ability	%	25	25
Maximum allowable working angle	°	2-3	2-3
tyre	mm	305×100	381×127
Whole machine weight	kg	1460	2090

		YZ-ZJ10	YZ-ZJ12	YZ-ZJ14
Safe working load	kg	320	320	230
Extended platform load	kg	113	113	113
Maximum number of workers	/	2	2	2
Maximum working height	m	12	13.8	15.7
Maximum platform height	m	10	11.8	13.7
Whole machine length	m	2.48	2.48	2.85
Whole machine width	m	1.19	1.19	1.25
Height of the whole machine, the guardrail is not folded	m	2.45	2.57	2.635
Height of the whole machine, folded guardrail	m	1.91	2.03	2.1
Working platform size	m	2.27×1.12	2.27×1.12	2.64×1.12
Extended platform size	m	0.9	0.9	0.9
Minimum ground clearance, collapsed	mm	0.9	0.9	0.9
Minimum ground clearance, lifting shape	mm	19	19	19
wheelbase (of a vehicle)	m	1.895	1.895	2.23
Minimum turning radius, inner wheel	m	0	0	0
Minimum turning radius, outer wheel	m	2.2	2.2	2.2
Hoisting motor	V/KW	24/3.3	24/4.5	24/4.5
Machine running speed, folding	KW/H	3.5	3.5	3.5
Machine running speed, lifting	km/h	0.8	0.8	0.8
Ascending/descending speed	sec	45/36	84/38	88/60
accumulator	V/AH	4×6/240	4×12/300	4×12/300
charger	V/A	24/25	24/25	24/25
Maximum climbing ability	%	25	25	25
Maximum allowable working angle	°	2-3	2-3	2-3
tyre	mm	381×127	381×127	381×127
Whole machine weight	kg	2640	2980	3600

COMMERCIAL CLEANING SERIES



YZ-LT1



YZ-LT3



YZ-DT2



YZ-LT2

SNOW SWEEPER SERIES



YZ-SXJ003



YZ-SXJ002-1



YZ-SXJ002-2



DC1517 >>>

Polisher

Functional Features

- more wear-resistant and durable
- a long battery life
- Ergonomic design



Product parameters

Item	Unit	parameter
Voltage	v	220
Power	w	1500
Frequency	HZ	50
Chassis diameter	inch	17
Speed	r/min	175
Noise	db	≤60
Weight	kg	42
Power cord	m	12

YZ-GY1



Product Parameters

Item	Unit	Number
Voltage	v	220
Power	w	1800
Rotating Speed	r/min	2800
Pressure	mPa	12
Flow	l	13
Size	mm	830*600*430

YZ-GY2



Product Parameters

Item	Unit	Number
Voltage	v	220
Power	w	2200
Rotating Speed	r/min	2800
Pressure	mPa	12
Flow	l	13
Size	mm	830*650*450

YZ-GY3



Product Parameters

Item	Unit	Number
Voltage	v	220
Power	w	1800
Rotating Speed	r/min	1450
Pressure	mPa	11
Flow	l	15
Size	mm	775*700*330

YZ-GY4



Product Parameters

Item	Unit	Number
Voltage	v	220
Power	w	3000
Rotating Speed	r/min	1450
Pressure	mPa	13
Flow	l	15
Size	mm	775*700*330



YZ-GY5



Product Parameters

Item	Unit	Number
Voltage	v	380
Power	w	3000
Rotating Speed	r/min	1450
Pressure	mPa	14
Flow	l	15
Size	mm	775*770*330

YZ-GY6



Product Parameters

Item	Unit	Number
Voltage	v	380
Power	w	4000
Rotating Speed	r/min	1450
Pressure	mPa	16
Flow	l	15
Size	mm	775*700*330

YZ-GY7



Product Parameters

Item	Unit	Number
Voltage	v	380
Power	w	5500
Rotating Speed	r/min	1450
Pressure	mPa	20
Flow	l	15
Size	mm	850*530*380

YZ-GY8



Product Parameters

Item	Unit	Number
Voltage	v	380
Power	w	7500
Rotating Speed	r/min	1450
Pressure	mPa	26
Flow	l	15
Size	mm	850*530*380



YZ-GY9



Functional Features

- Visual Pressure Regulation
Adjust the pressure according to the actual situation, saving time and water
- Automatic Start And Stop
Water And Energy Saving
Environmental Protection And Green
- High Pressure Explosion-proof Water Pipe

Product Parameters

Item	Unit	Number
Voltage	v	380
Power	w	10000
Rotating Speed	r/min	1450
Pressure	mPa	30
Flow	l	15
Size	mm	1000*800*600



J1



Product Parameters

Item	Unit	Number
Voltage	v/hz	220/50
Suction Motor Power	w	800
Water Pump	w	50
Water Pressure	bar	4.8
Clean/Sewage Water Tank	l	14/8
Flow	lpm	4.8
Throat Length	m	4
Wire Length	m	8
Noise Level	db	60
Weight	kg	10

J2



Product Parameters

Item	Unit	Number
Working Width	in	170
Load Speed	rpm	200
Speed Mode	/	gear turning
Power	w	1800
Power Cable	m	15
Weight Ron	kg	10/3
Voltage	v/hz	220/50
Net Weight	kg	60
Amount Of Noise	db	≤60
Product Size	mm	300*2000*300